

4K HDMI USB KVM Extender with RS-232 Audio

Model:KH5000_Pro

Features


- Through the network route, extends the HDMI + USB Hub keyboard mouse + voice signal point-to-point by 150 meters, with a resolution of 4K@30Hz.
- The ultra-low delay of this machine is less than 50ms.
- Built-in USB Hub can connect USB peripheral devices.
- One Giga switch can connect multiple transmitters and multiple receivers at the same time.
- The transmitter and receiver DIP SWITCH are in the same position to complete 1-to-1 signal extension.
- Pure hardware design, plug and play, no need to install additional software.
- Sound support embedding: No sound HDMI image input and sound synchronization 3.5mm, combined into a sound HDMI video output.
- Support for sound de-embedding: Sound HDMI image input, separate sound HDMI image, and 3.5mm sound output.
- Support HDMI audio 2CH/5.1CH/7.1CH/DTS/Dolby format.
- Support POE power supply (802.3AF), convenient for construction.

Specification


MODLE NAME	HK5000_Pro
Transmitter Interface	1 x HDMI in, 1 x 3.5mm in, 1 x 3.5mm out 1 x USB in, 1 x RJ-45 out, 1 x Fiber out 1 x RS-232
Receiver Interface	1 x HDMI out, 1 x 3.5mm in, 1 x 3.5mm out 4 x USB Hub out, 1 x RJ-45 in, 1 x Fiber out 1 x RS-232
SFP interface	Single Mode Single Core LC interface included
Video Resolution	4K@30Hz / 1080p@60Hz / 1080p@50Hz 1080p@30Hz / 720p@60Hz / 720p@50Hz 480p@60Hz
Transmission Distance	150m(Max)
USB Transmit Speed	480M bit/s (Max)
Material	Metal
Operating Temperature Range	0 to 40°C
Operating Humidity Range	5 to 85% RH
Power Supply	AC 110V-240V 50/60HZ DC 12V
Dimension	125 × 83 × 25 mm (TX or RX) (L x W x H)

Product Image

TX

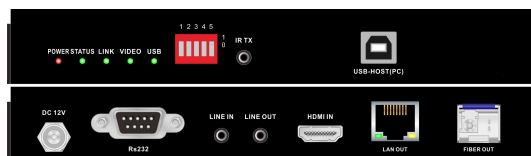

RX

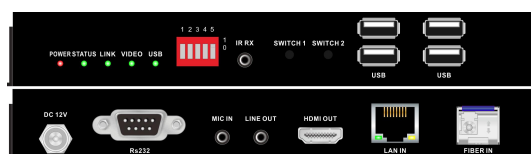

Package contents

- 1 X KH5000_Pro-T Transmitter
- 1 X KH5000-Pro Receiver
- 1 X 12V adapter
- 1 X User manual